

ALTERNATIVE
FUEL SYSTEMS

Prins

VSI LPG
Vapour Sequential Injection®

Quality, innovation and customer care, it's in our nature




VSI

- VSI : Vapour Sequential Injection
- Fully integrated "master – slave" management system
- EOBD compatible (no signal emulation required)
- System diagnostics by monitoring vital signals and components
- Emission strategy functions for optimisation
- System communication via CAN-bus prepared
- Available for LPG and CNG configurations
- LPG performance comparable to petrol
- R67-01 and R 110 homologated
- Corrosion protected




REDUCER

- Single stage
- Large capacity (14gr/s)
- Stable dynamic characteristics
- Adjustable pressure range with anti-tamper seal
- Map independent system, due to excellent LFR of injector
- Map function, optional if required
- Integrated OEM coolant sensor
- Complies with R67-01 homologation with 5 bar pressure relieve valve
- Complete with electronic lock off valve, liquid filter, and magnet
- Compact design for ease of installation

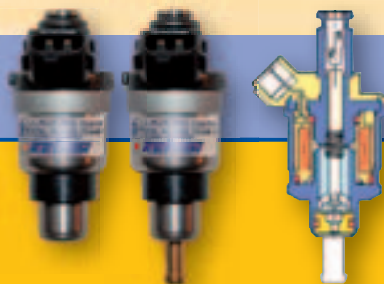

KEIHIN OEM INJECTOR

- Developed by Keihin Corp. Japan (in cooperation with Prins), one of the world's leading injector manufacturer, ensuring quality and reliability
- Excellent linear flow rate (LFR = linear behavior from minimum to maximum flow)
- Linear from 2,5 ms
- Model range available to cater for small and large engine displacement
- OEM quality injectors, performance guaranteed and long durability (290 million cycles)

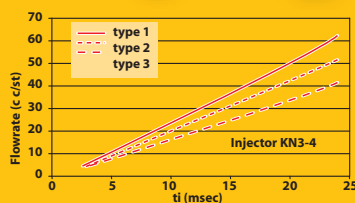

INJECTOR RAIL

- Uncomplicated fitting
- Assembled and leak tested at factory prior to despatch
- 2/3/4/5/6 cylinder assemblies




FILTER UNIT

- Compact design with single or dual delivery outlets
- Fitted with 10-micron ($\beta_{10} > 75$) dry gas filter protecting the fine tolerance of the injectors, from gaseous pollutants
- Combined gaseous temperature and pressure sensor



VSI ECM

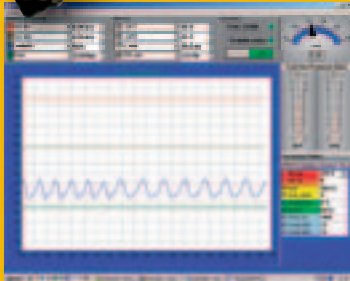

- ECM injector driver capability up to 10 cylinders
- Injector drivers based on "closed loop peak & hold current control"
- Injector diagnostics constant monitoring:
 - No load
 - Overload
 - Driver temperature
 - Short circuit
- Diagnostics, service and parameter load software operates from Windows 98 / 2000 / XP / Vista applications
- CAN-controller (2.0b) communication possible with OEM CAN-bus
- Complete wiring harness: colour coded, with text and numbering to ensure simple and efficient installation



FUEL SELECTOR SWITCH

- Small and compact design suits all cabin interiors
- Fuel select: via smart touch control, informs operator of LPG tank contents, audible buzzer to alert low level switching or fault codes, illuminated fault code warning with LED



TANK DIMENSIONS

- Cylindrical tanks available: 30ltr. – 230 ltr.
- Torodial space saving tanks available to suit all applications: 51ltr. - 95 ltr.
- Spare wheel covers, flat tyre repair available



